

 **fmachine**rocky

Should you have any issues with your F-Machine, Rocky or require spare parts,
please contact your nearest F-Machine retailer or email us directly at sales@f-machine.com

Congratulations on your purchase of Rocky.
Rocky is a revolutionary NEW male masturbator attachment, designed for the f-machine range with some very special attributes.


Note: will also fit some other machines utilising 10- 12.7mm (1/2 inch) thrust rods).

Rocky can masturbate your penis in the comfort of your arm-chair whilst at home watching tv or even lying down on the floor or on a bed. However, if you are feeling particularly adventurous, Rocky has been designed to retain the capability for anal play + masturbation simultaneously (yes you did just read the right...).

So, just to recap for those at the back, you can have your willy-wanged on it's own, or if you are feeling brave/ experimental, you can have you willy-wanged AND have your bum fun'dled at the same time... simple as that really.

I know you want to get on & get Rockying, however we need you to take your time and get Rocky set-up properly... rushing with machines can be dangerous, so take your time and get things right before you switch on.

In order to see how Rocky goes together, take a look at the following exploded diagram.

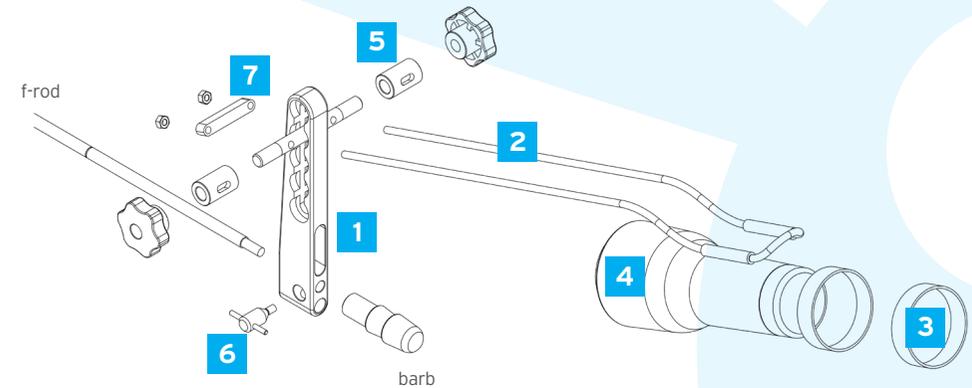

Rocky consists of the following main components:


- 1 CNC main body
- 2 Masturbator carrier (adjustable, slides back & forth)
- 3 Velcro straps (hold masturbator to carrier)
- 4 Masturbator (either ass or pussy supplied as requested)
- 5 Adjustment mechanism (upper thumbscrews)
- 6 Lower thumbscrew (to attach Rocky to f-rod on f-machine)
- 7 Safety bar

Setting up:


First ensure that Rocky is assembled correctly as per the exploded diagram.

Mount Rocky to your f-machine f-rod by sliding the f-rod through the small hole at the base of the CNC main body (you will need to remove the vaculoc barb 1st).


Once aligned in approximately the correct position, tighten the lower thumbscrew to lock Rocky on to the f-rod. **Note:** the CNC main body should be perpendicular to the ground or the surface the f-machine is resting on.

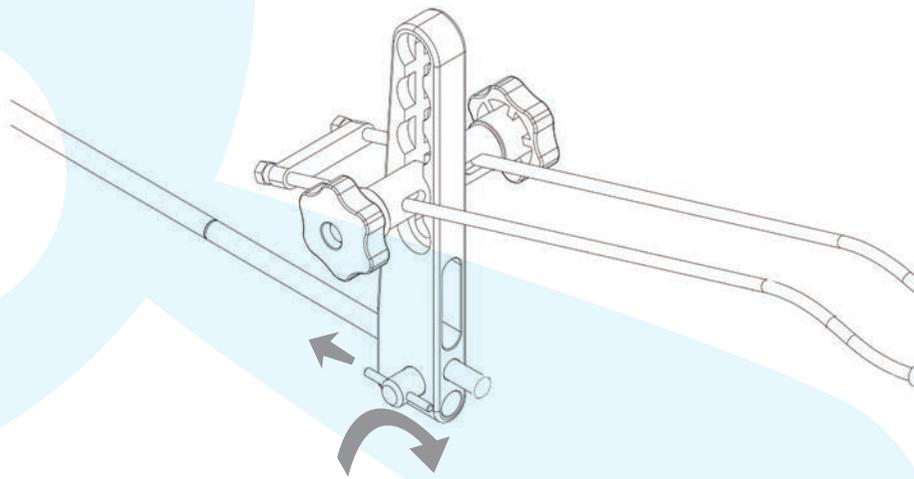

Now mount the masturbator to the carrier using the Velcro straps. (If you are using an anal toy, it's also time to mount this using the vaculoc 'barb' so replace the barb if you have not already done so).

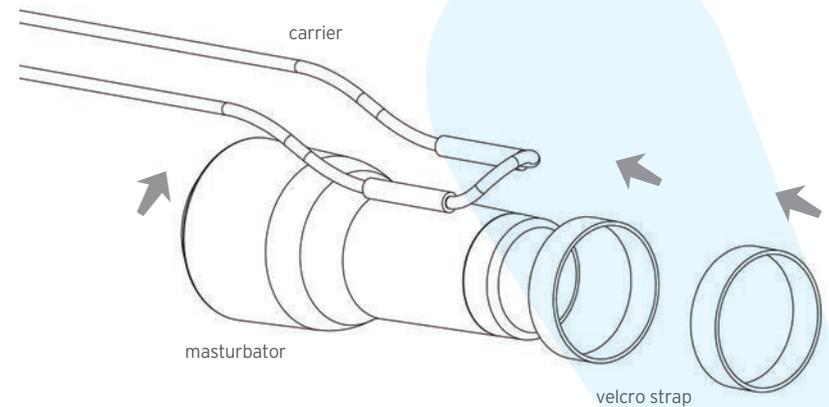

Now the tricky bit, you need to position yourself under the carrier and adjust the carrier height position (various height holes within CNC main body) and also adjust the carrier position in relation to the CNC main body by sliding it backwards or forwards as required until you have everything in the desired location (you need to loosen the 2 thumbwheels to allow the carrier to slide back and forth then lock into position). You will be able to make other adjustments on the fly easily enough to perfect all the angles.

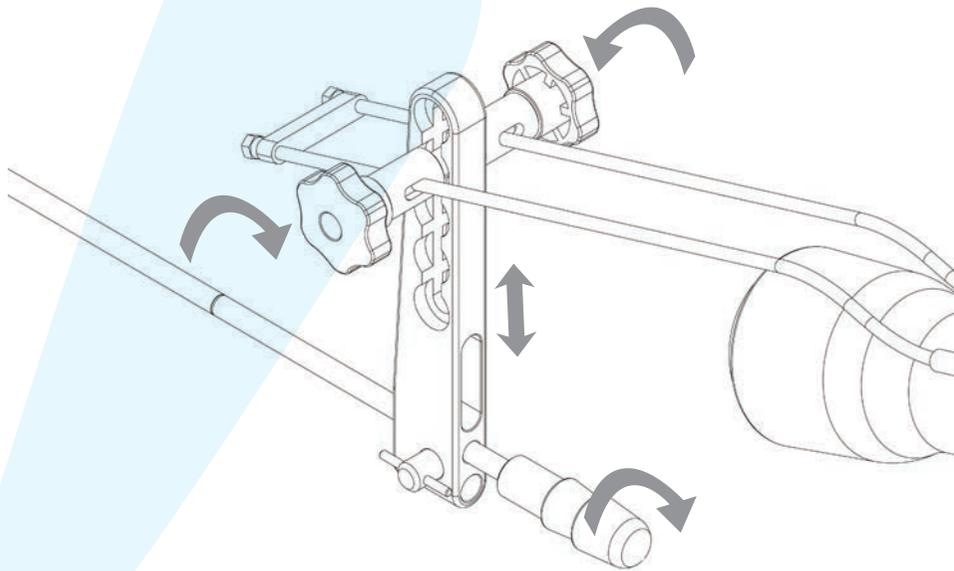

It's going to take a bit of fiddling and faffing to get Rocky set-up for the 1st time, but once you are happy with the alignment you wont really have to change it again...

Once you are happy everything is lined up roughly where you want it, turn the machine on but at a very slow speed setting to make sure none of the components are fowling against each other & the machine is free to fully spin over without restriction.

All clear and ready for lift-off?

now lube up your toys & fire up your f-machine, be prepared to have you mind **BLOWN OUT!**

WARNING we have seen grown men reduced to gibbering, pathetic, speechless wrecks after just 1 hour with Rocky... you have been warned, use with extreme caution.